

# 1. Product data

## Introduction

This data booklet deals with Grundfos CR, CRI and CRN as well as CRE, CRIE and CRNE pumps.

### CR, CRI, CRN



Fig. 1 CR, CRI and CRN pumps

CR, CRI and CRN pumps are vertical, multistage centrifugal pumps. The in-line design of the pumps enables installation in a horizontal one-pipe system where the suction and discharge ports are in the same horizontal level and have the same pipe dimensions. This design provides a more compact pump design and pipework.

Grundfos CR pumps are available in various sizes and various numbers of stages to provide the flow and pressure required.

CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide diversity of pumping systems where the performance and material of the pump meet specific demands.

The CR pumps consist of two main components: the motor and the pump unit. The CR pump motor is a Grundfos motor designed to EN standards.

The pump unit consists of optimised hydraulics, various types of connections, a sleeve, a pump head and various other parts.

CR pumps are available in various material versions according to the pumped liquid.

### CRE, CRIE, CRNE



Fig. 2 CRE, CRIE and CRNE pumps

CRE, CRIE and CRNE pumps are built on the basis of CR, CRI, CRN pumps.

CRE, CRIE and CRNE pumps belong to the so-called E-pump family. CRE, CRIE and CRNE pumps are referred to as E-pumps.

The difference between the CR and CRE pump ranges is the motor. CRE, CRIE and CRNE pumps are fitted with an E-motor, i.e. a motor with built-in frequency converter.

The CRE pump motor is a Grundfos MGE motor designed to EN standards.

The frequency converter enables continuously variable control of the motor speed, which makes it possible to set the pump to operation at any duty point. The purpose of continuously variable speed control of the motor speed is to adjust the performance to a given requirement.

CRE, CRIE and CRNE pumps are available with an integrated pressure sensor connected to the frequency converter.

The pump materials are identical to those of the CR, CRI and CRN pump range.

#### Selecting a CRE pump

Select a CRE pump if the following features are required:

- Controlled operation, i.e. consumption fluctuates.
- Constant pressure.
- Communication with the pump.

Adaptation of performance through frequency-controlled speed control offers obvious benefits such as:


- energy savings
- increased comfort
- control and monitoring of the pump performance.

GR 5381

TM02 7397 0511


EDUPUMP.IR

### Performance range of CR, CRI, CRN

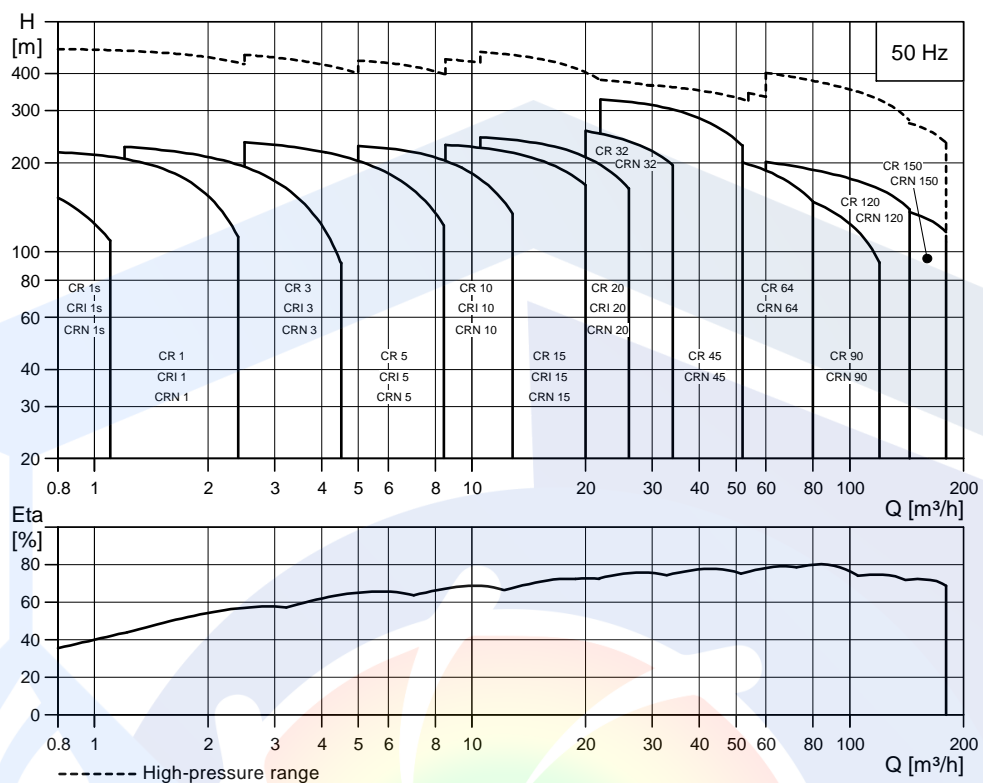

TM02 1192 4708

### Performance range of CRE, CRIE, CRNE

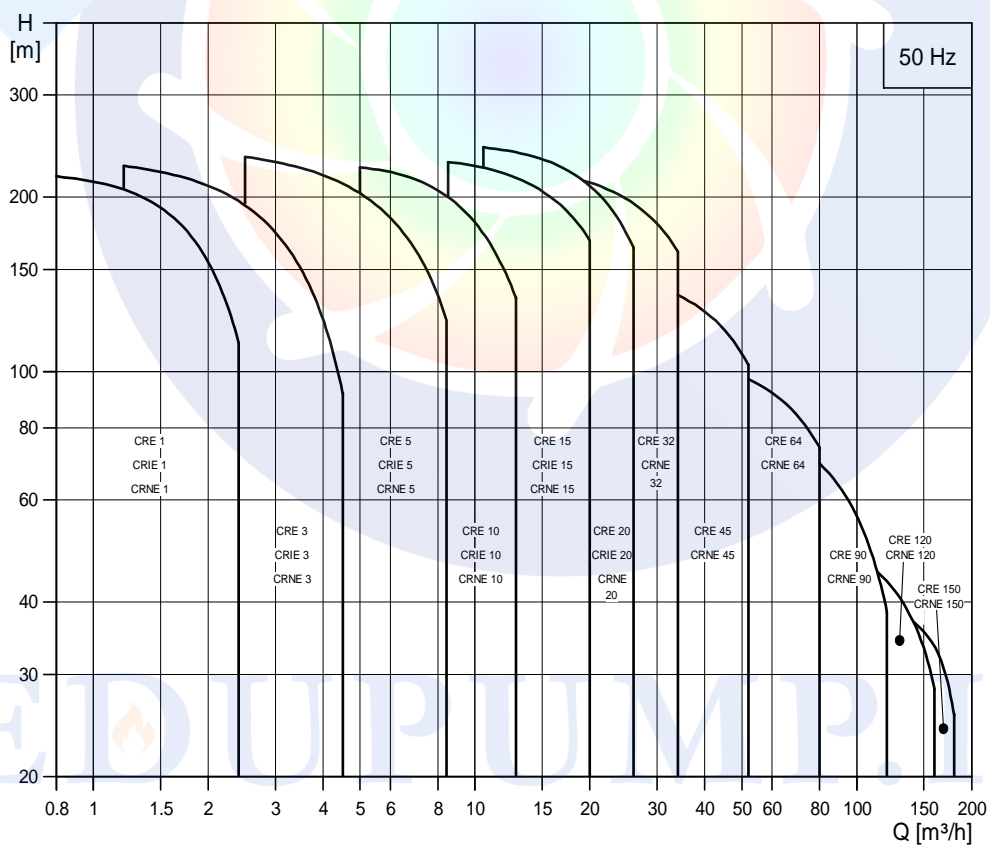

TM02 7281 4708

### 3. Construction

### CRI(E), CRN(E) 1s, 1, 3, 5, 10, 15 and 20

#### CR(E) 1s, 1, 3, 5, 10, 15 and 20




TM02 1195 0601 - GR7377 - GR7379




TM02 1808 2001 - GR7373 - GR7375

#### Sectional drawing

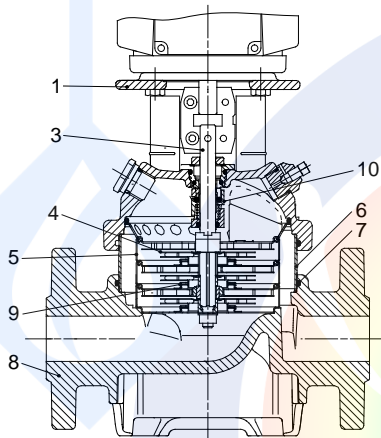

TM02 1194 1403

#### Sectional drawing

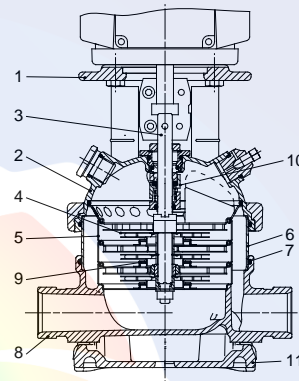

TM02 1195 1403

#### Materials, CR(E)

Pos.	Designation	Materials	EN/DIN	AISI/ASTM
1	Pump head	Cast iron EN-GJL-200	EN-JL1030	ASTM 25B
3	Shaft	Stainless steel	1.4401 <sup>1)</sup> 1.4057 <sup>2)</sup>	AISI 316 AISI 431
4	Impeller	Stainless steel	1.4301	AISI 304
5	Chamber	Stainless steel	1.4301	AISI 304
6	Sleeve	Stainless steel	1.4301	AISI 304
7	O-ring for sleeve	EPDM or FKM		
8	Base	Cast iron EN-GJL-200	EN-JL1030	ASTM 25B
9	Neck ring	PTFE		
10	Shaft seal			
	Rubber parts	EPDM or FKM		

1) CR(E) 1S, 1, 3, 5.

2) CR(E) 10, 15, 20.

#### Materials, CRI(E) and CRN(E)




Pos.	Designation	Materials	EN/DIN	AISI/ASTM
1	Pump head	Cast iron EN-GJL-200 <sup>1)</sup>	EN-JL1030	ASTM 25B
2	Pump head cover	Stainless steel	1.4408	CF 8M equal to AISI 316
3	Shaft	Stainless steel	1.4401 <sup>2)</sup> 1.4460 <sup>3)</sup>	AISI 316 AISI 329
8	Base	Stainless steel	1.4408	CF 8M equal to AISI 316
9	Neck ring	PTFE		
10	Shaft seal	Cartridge type		
11	Base plate	Cast iron EN-GJL-200 <sup>1)</sup>	EN-JL1030	ASTM 25B
	Rubber parts	EPDM or FKM		
CRI(E)				
4	Impeller	Stainless steel	1.4301	AISI 304
5	Chamber	Stainless steel	1.4301	AISI 304
6	Sleeve	Stainless steel	1.4301	AISI 304
7	O-ring for sleeve	EPDM or FKM		
CRN(E)				
4	Impeller	Stainless steel	1.4401	AISI 316
5	Chamber	Stainless steel	1.4401	AISI 316
6	Sleeve	Stainless steel	1.4401	AISI 316
7	O-ring for sleeve	EPDM or FKM		

1) Stainless steel available on request.

2) CRI(E), CRN(E) 1S, 1, 3, 5.


3) CRI(E), CRN(E) 10, 15, 20.

## CR, CRE 1

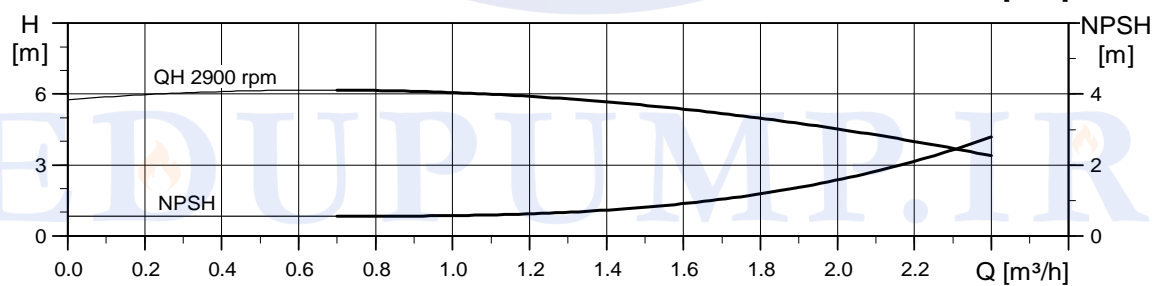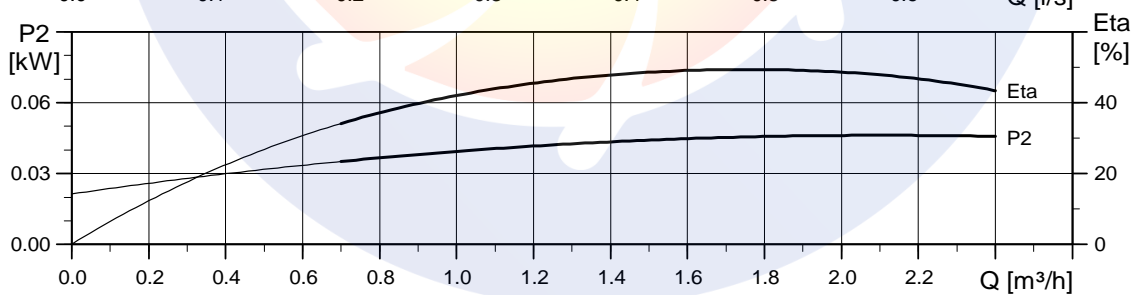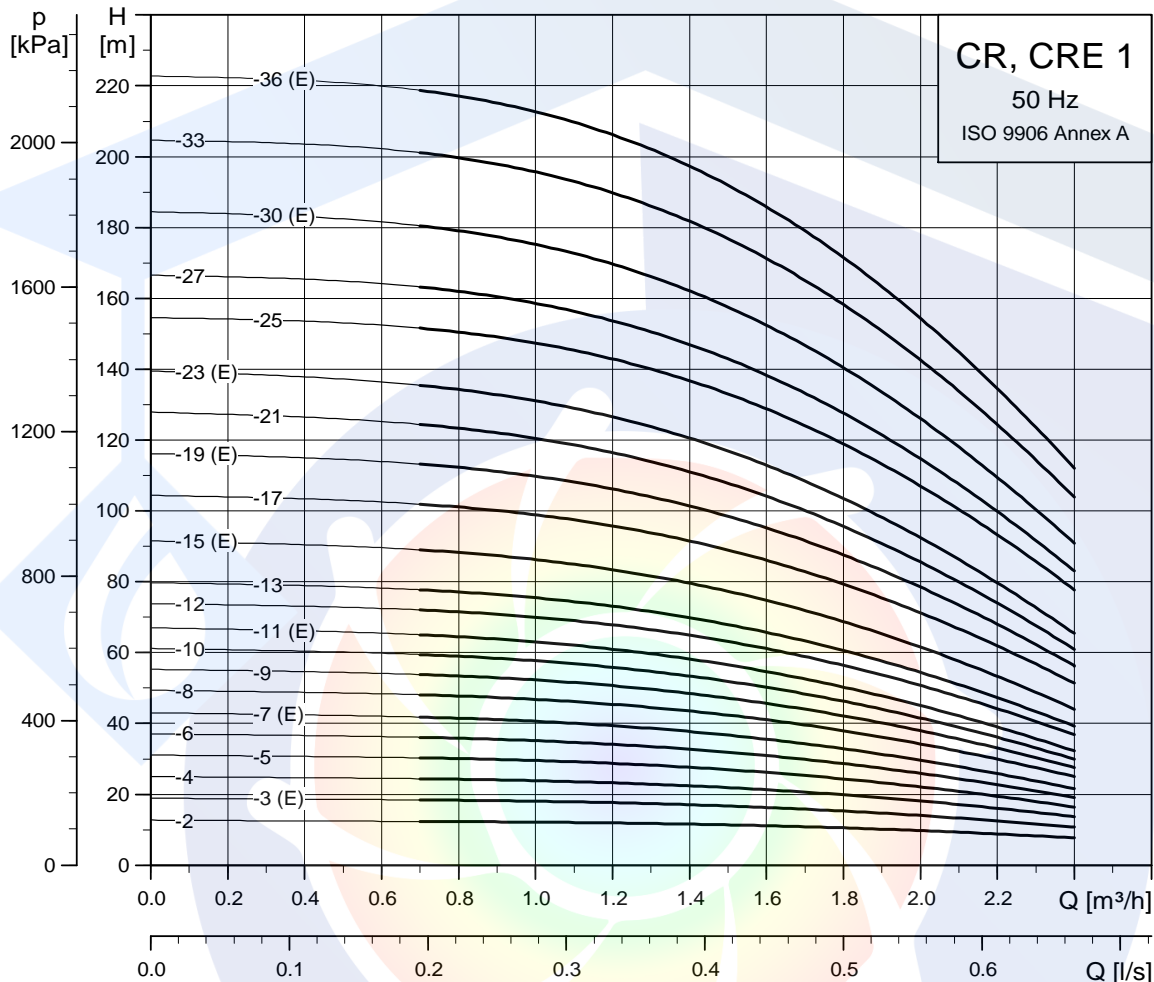

TM02 7290 3605

## Dimensional sketch

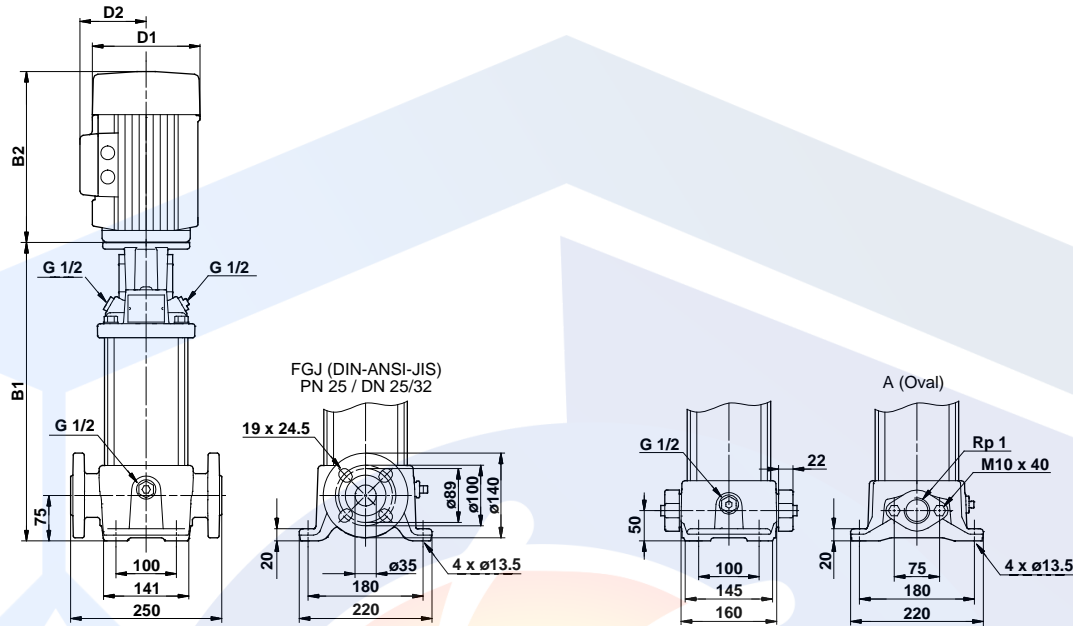

TM03 1721 2805

## Dimensions and weights

Pump type	Motor P <sub>2</sub> [kW]	CR								CRE							
		Dimension [mm]				Net weight [kg]				Dimension [mm]				Net weight [kg]			
		Oval flange		DIN flange		D1	D2	Oval flange	DIN flange	Oval flange		DIN flange		D1	D2	Oval flange	DIN flange
B1	B1+B2	B1	B1+B2	B1	B1+B2					B1	B1+B2						
CR 1-2	0.37	254	445	279	470	141	109	18	23	-	-	-	-	-	-	-	-
CR(E) 1-3	0.37	254	445	279	470	141	109	18	23	254	445	279	470	141	140	21	26
CR 1-4	0.37	272	463	297	488	141	109	19	23	-	-	-	-	-	-	-	-
CR 1-5	0.37	290	481	315	506	141	109	19	24	-	-	-	-	-	-	-	-
CR 1-6	0.37	308	499	333	524	141	109	20	24	-	-	-	-	-	-	-	-
CR(E) 1-7	0.37	326	517	351	542	141	109	20	25	326	517	351	542	141	140	23	27
CR 1-8	0.55	344	535	369	560	141	109	21	26	-	-	-	-	-	-	-	-
CR 1-9	0.55	362	553	387	578	141	109	21	26	-	-	-	-	-	-	-	-
CR 1-10	0.55	380	571	405	596	141	109	22	26	-	-	-	-	-	-	-	-
CR(E) 1-11	0.55	398	589	423	614	141	109	22	27	398	589	423	614	141	140	25	29
CR 1-12	0.75	422	653	447	678	141	109	24	29	-	-	-	-	-	-	-	-
CR 1-13	0.75	440	671	465	696	141	109	25	29	-	-	-	-	-	-	-	-
CR(E) 1-15	0.75	476	707	501	732	141	109	26	30	476	707	501	732	178	167	29	33
CR 1-17	1.1	512	763	537	788	141	109	29	33	-	-	-	-	-	-	-	-
CR(E) 1-19	1.1	548	799	573	824	141	109	29	34	548	779	573	804	178	167	32	36
CR 1-21	1.1	584	835	609	860	141	109	30	35	-	-	-	-	-	-	-	-
CR(E) 1-23	1.1	620	871	645	896	141	109	31	36	620	851	645	876	178	167	33	38
CR 1-25	1.5	-	-	697	978	178	110	-	44	-	-	-	-	-	-	-	-
CR 1-27	1.5	-	-	733	1014	178	110	-	44	-	-	-	-	-	-	-	-
CR(E) 1-30	1.5	-	-	787	1068	178	110	-	46	-	-	787	1068	178	167	-	52
CR 1-33	2.2	-	-	841	1162	178	110	-	47	-	-	-	-	-	-	-	-
CR(E) 1-36	2.2	-	-	895	1216	178	110	-	49	-	-	895	1216	178	167	-	59

EDUPUMP.IR





**EDUPUMP**  
WWW.EDUPUMP.IR

## اولین و بزرگترین

سایت تخصصی سیستم‌های پمپاژ  
با امکان محاسبه آنلاین و انتخاب پمپ

## تولید بوستر پمپ آتش نشانی

در کلاس‌های S3 - S2 - S1  
مورد تایید سازمان آتش نشانی تهران



ایمنی و اطفاء حریق

آب و فاضلاب

اولین و بزرگترین مرجع انتخاب آنلاین سیستم‌های پمپاژ

انتخاب آنلاین انواع بوستر پمپ

انتخاب آنلاین انواع پمپ

ارائه مطالب تخصصی

## اولین سایت مرجع

## انتخاب آنلاین پمپ

در حوزه‌های:

ایمنی و آتش نشانی  
آب و فاضلاب  
صنایع غذایی  
استخر  
صنعت  
معدن



## تولید بوستر پمپ

## آبرسانی دور متغیر

بدون محدودیت برند



## آموزش

تهویه و تخلیه دود  
سیستم‌های پمپاژ  
ایمنی معماری  
اطفاء حریق  
اعلام حریق

## مشاوره - طراحی - اجراء

تاسیسات مکانیکی (موتورخانه - استخر)  
تهویه و تخلیه دود  
سیستم‌های پمپاژ  
ایمنی معماری  
اعلام حریق  
اطفاء حریق

تهران، سعدی شمالی، خیابان مرادی نور، پلاک ۳۱

تلفن: ۰۲۱-۷۷۶۸۶۹۶۶ فکس: ۰۲۱-۷۷۶۷۸۶۵۹

EDUPUMP.IR

WWW.EDUPUMP.IR