

APPLICATIONS

LVR(S) series, vertical multistage centrifugal pump, is suitable for transferring liquids of low viscosity, non-inflammable and non-explosive, not containing solid particles or fibers.

- Water supply: water supply & drainage for high-rise buildings, filtration and transfer at waterworks, pressure boosting in main pipe
- Industry: Washing and cleaning systems, boiler feeding, cooling water circulation, water treatment systems, auxiliary system, support equipment
- Water treatment: ultra-filtration systems, reverse-osmosis systems, distillation systems, separators, swimming pools
- Agricultural irrigation: sprinkler irrigation, drip-feed irrigation
- Food & beverage industry
- Fire-fighting system

FEATURES

- Compact, nice appearance, efficient, low noise, reliable seal, easy to use and maintain

OPERATING CONDITIONS


Low viscosity, non-inflammable and non-explosive liquids not containing solid particles or fibers. The liquids must not chemically attack the pump materials. When pumping liquids with a density or viscosity is higher than that of water, a motor with a higher output power rating shall be used.

- Liquid temperature: -15°C+120°C
- Flow ranges: 0.7-85m³/h
- pH: 3~9
- Max. ambient temperature: +40°C
- Max. operation pressure: 33bar
- Altitude: up to 1000m

MOTOR

- Totally enclosed & fan-cooled motor
- Protection class: IP 55
- Standard voltage: 50Hz 1 x 220V/3 x 380V

IDENTIFICATION CODES

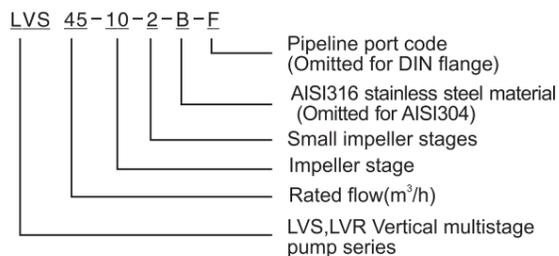

LVS: Stainless steel wetted parts
LVR: Cast iron base & pump cover

Identifications codes of flange structure

F: DIN flange ; A: Oval flange
K: Clamp connector ; G: Threaded connector




000003

AMBIENT TEMPERATURE

Max. ambient temperature: + 40°C. Ambient temperature above 40 or installation at altitude of more than 1000 meters above sea level require the use of an oversize motor. Because of low air density and poor cooling effects, the motor output power P₂ will be decreased. See the picture.

In such cases, it may be necessary to use a motor with a higher output power rating.

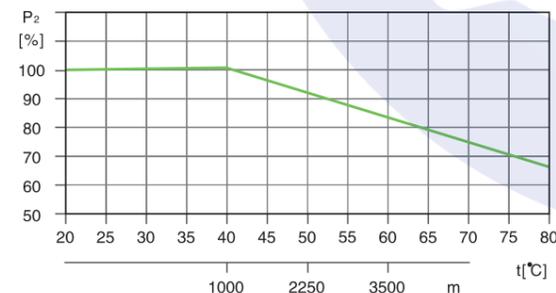

For example, when the pump is installed at altitude of more than 3500 meters above sea level, P₂ will be decreased to 88%. When the ambient temperature is 70°C, P₂ will be decreased to 78%.

MINIMUM INLET PRESSURE-NPSH

Calculation of the inlet pressure "H" is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump. The maximum suction lift "H" in meters head can be calculated as follows:

$$H = P_b \times 10.2 - NPSH - H_f - H_v - H_s$$

P_b = Barometric pressure in bar. (Barometric pressure can be set to 1 bar). In closed systems, P_b indicates the system pressure in bar.

NPSH = Net Positive Suction Head in meters head. (To be read from the NPSH curve at the highest flow the pump will be delivering.)


H_f = Friction loss in suction pipe in meters head. (At the highest flow the pump will be delivering.)

H_v = Vapor pressure in meters head. (To be read from the vapor pressure scale. "H_v" depends on the liquid temperature "tm")


H_s = Safety margin=minimum 0.5 meters head.

If the "H" calculated is positive, the pump can operate at a suction lift of maximum "H" meters head.

If the "H" calculated is negative, an inlet pressure of minimum "H" meters head is required.

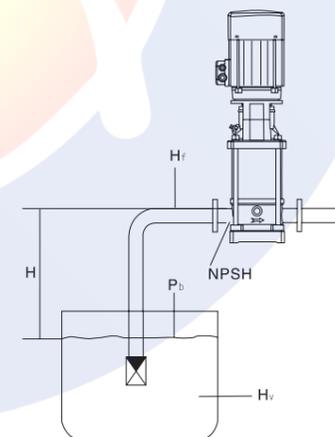

Note: To avoid cavitation, never select a pump with a duty point too far to the right on the NPSH curve. Always check the NPSH value of the pump at the highest possible flow.




MAXIMUM INLET PRESSURE

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve must always be lower than the Max. permissible operating pressure.

If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

Pump Type	Maximum Inlet Pressure [bar]
LVR1,LVS1	
1-2 — 1-36	10
LVR2,LVS2	
2-2	6
2-3 — 2-11	10
2-13 — 2-26	15
LVR3,LVS3	
3-2 — 3-29	10
3-31 — 3-26	15
LVR4,LVS4	
4-2	6
4-3 — 4-10	10
4-12 — 4-22	15
LVR5,LVS5	
5-2 — 5-16	10
5-18 — 5-29	15
LVR10,LVS10	
10-1 — 10-6	8
10-7 — 10-22	10
LVR15,LVS15	
15-1 — 15-3	8
15-4 — 15-17	10
LVR20,LVS20	
20-1 — 20-3	8
20-4 — 20-17	10
LVR32,LVS32	
32-1-1 — 32-4	4
32-5-2 — 32-10	10
32-11 — 32-14	15
LVR45,LVS45	
45-1-1 — 45-2	4
45-3-2 — 45-5	10
45-6-2 — 45-13-2	15
LVR64,LVS64	
64-1-1 — 64-2-2	4
64-2-1 — 64-4-2	10
64-4-1 — 64-8-1	15


HOW TO READ THE CURVE CHARTS

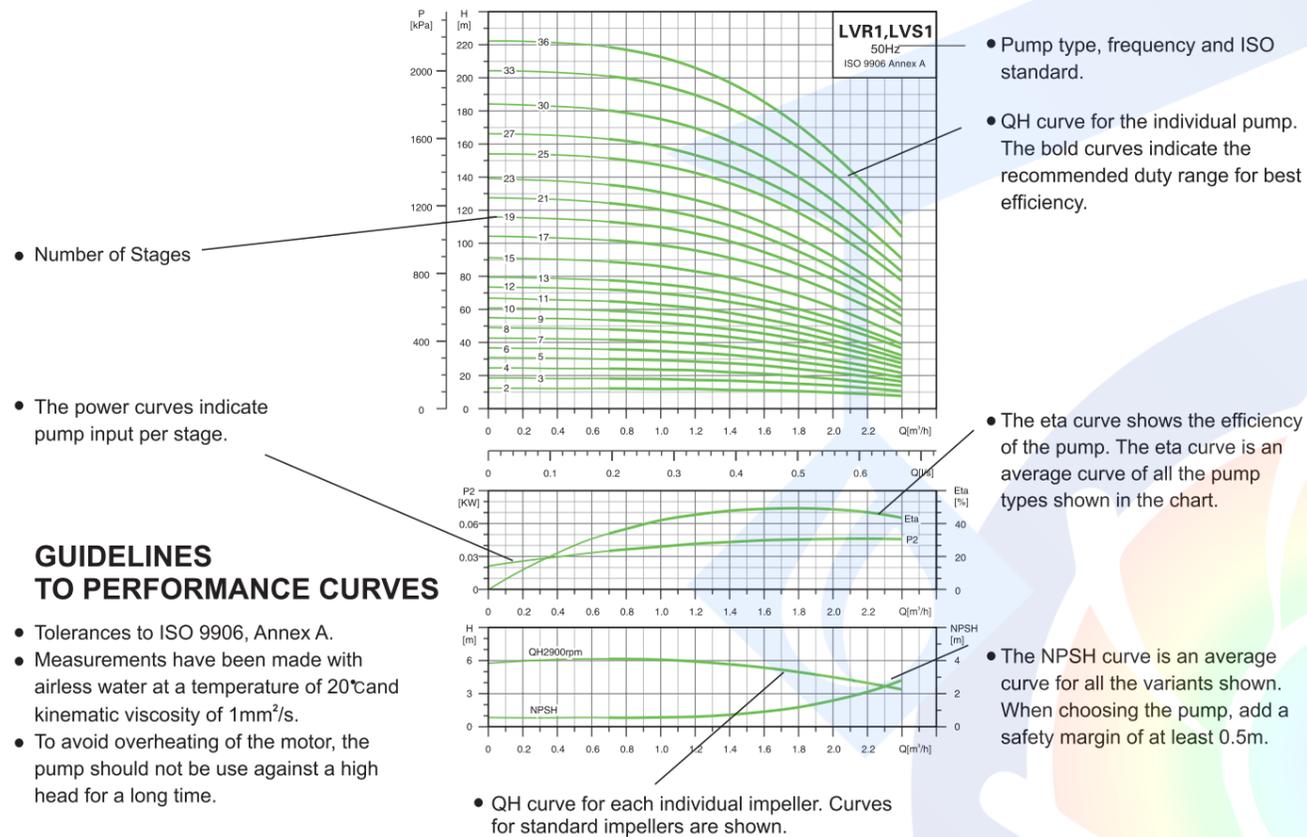

MINIMUM FLOW RATE

Due to the risk of overheating, the pump should not be used at a flow below the minimum flow rate. The curve below shows the minimum flow rate as a percentage of the nominal flow rate in relation to the liquid temperature.


Air cooling apparatus

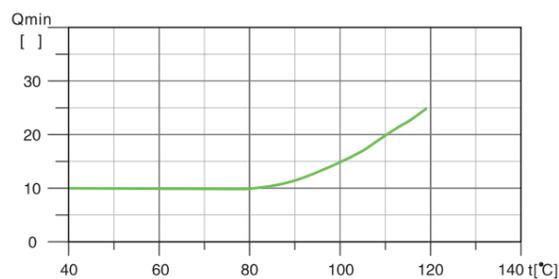

Note: The outlet valve must be opened when the pump is in operation.

TERMINAL BOX POSITIONS

(Note: set to position 1 before delivery)

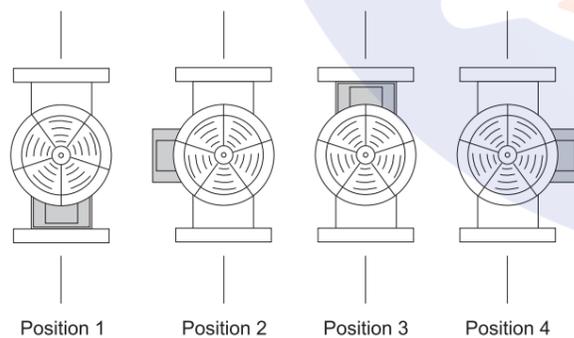


PRODUCT RANGE

MODEL	LVR(S)1	LVR(S)2	LVR(S)3	LVR(S)4	LVR(S)5	LVR(S)10	LVR(S)15	LVR(S)20	LVR(S)32	LVR(S)45	LVR(S)64
DESCRIPTION											
Rated flow [m ³ /h]	1	2	3	4	5	10	15	20	32	45	64
Flow range [m ³ /h]	0.7–2.4	1.0–3.5	1.2–4.5	1.5–8	2.5–8.5	5–13	8–23	10.5–29	15–40	22–58	30–85
Max. pressure [bar]	22	23	24	21	24	22	23	25	28	33	22
Motor power [kW]	0.37–2.2	0.37–3	0.37–3	0.37–4	0.37–4	0.37–7.5	1.1–15	1.1–18.5	1.5–30	3–45	4–45
Temperature Range [°C]	–20°C~+120°C (Note: Both the Max. permissible pressure and liquid temperature range refer to the pump capacity.)										
Max. pump efficiency [%]	45	46	55	59	60	65	70	72	78	79	80
Pipe connection-LVR											
Oval flange	G1	G1	G1	G1 1/4	G1 1/4	–	–	–	–	–	–
DIN flange	–	–	–	–	–	DN 42	DN 50	DN 50	DN 65	DN 80	DN 100
Flange structure	○	○	○	○	○	○	○	○	●	●	●
Pipe connection-LVS											
Oval flange	–	–	–	–	–	–	–	–	–	–	–
DIN flange	DN 32	DN 32	DN 32	DN 32	DN 32	DN 42	DN 50	DN 50	DN 65	DN 80	DN 100
Clamp connector	φ42	φ42	φ42	φ42	φ42	–	–	–	–	–	–
Threaded connector	G1 1/4	G1 1/4	G1 1/4	G1 1/4	G1 1/4	–	–	–	–	–	–
Flange structure	●	●	●	●	●	●	●	●	●	●	●


Note: ○ It means stationary flange structure, ● It means dynamic flange structure

SCOPE OF PERFORMANCE-LVR,LVS

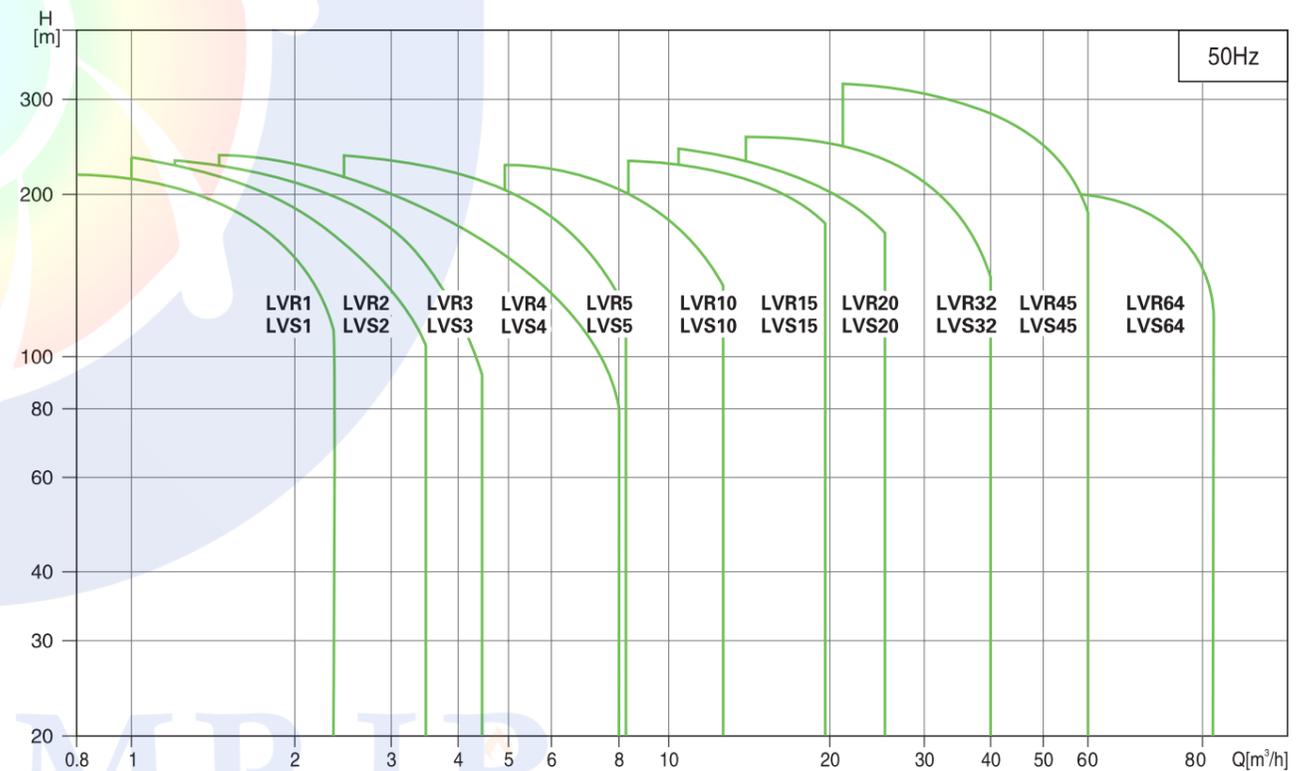


EDUPUMP.IR

CROSS SECTION

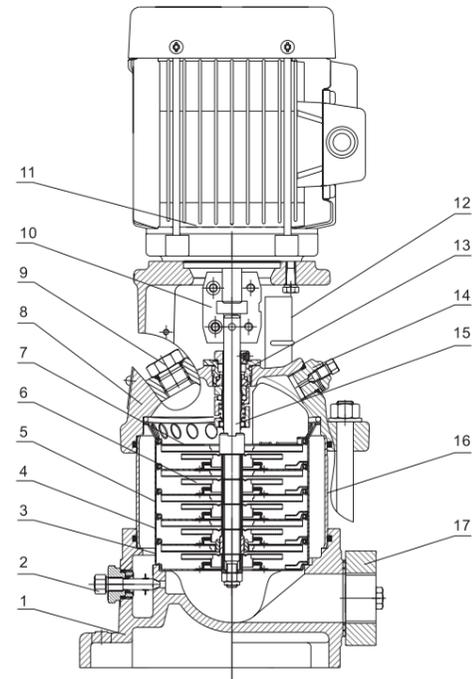

MODEL: LVR1(2,3,4,5)


Part	Material	
1	Base	HT200
2	Drainage plug assembly	AISI304
3	Primary diffuser	AISI304
4	Diffuser with bearing	AISI304
5	Medium diffuser	AISI304
6	Impeller	AISI304
7	Final diffuser	AISI304
8	Motor base	HT200
9	Filling plug	AISI304
10	Coupling	Iron based powder metallurgy
11	Motor	
12	Guarding plate	AISI304
13	Cartridge seal	
14	Vent plug assembly	AISI304
15	Pump shaft	AISI304
16	Pump barrel	AISI304
17	Oval flange	HT200

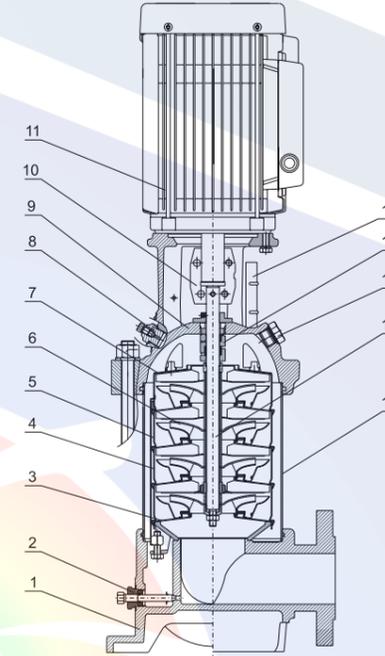

MODEL: LVR10(15,20)


Part	Material	
1	Base	HT200
2	Drainage plug assembly	AISI304
3	Primary diffuser	AISI304
4	Diffuser with bearing	AISI304
5	Medium diffuser	AISI304
6	Impeller	AISI304
7	Final diffuser	AISI304
8	Filling plug	AISI304
9	Motor base	HT200
10	Coupling	Iron based powder metallurgy
11	Motor	
12	Guarding plate	AISI304
13	Cartridge seal	
14	Vent plug assembly	AISI304
15	Pump shaft	AISI304
16	Pump barrel	AISI304

000003

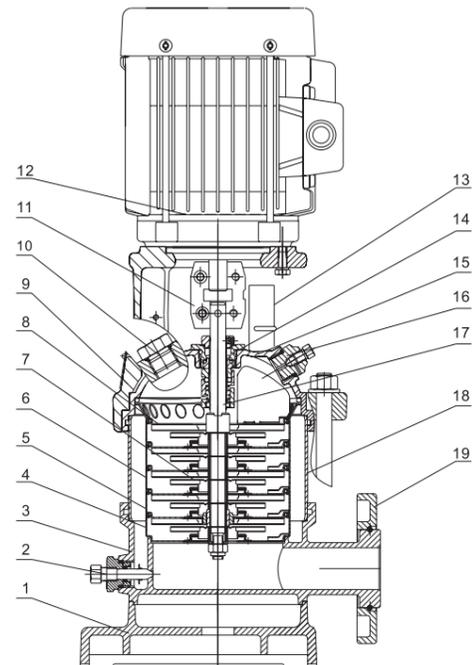

MODEL: LVS1(2,3,4,5)

Part	Material	Optional Material	
1	Base plate	HT200	
2	Drainage plug assembly	AISI304	AISI316
3	Chasis	ZG304	ZG316
4	Primary diffuser	AISI304	AISI316
5	Diffuser with bearing	AISI304	AISI316
6	Medium diffuser	AISI304	AISI316
7	Impeller	AISI304	AISI316
8	Final diffuser	AISI304	AISI316
9	Motor base	HT200	
10	Filling plug	AISI304	AISI316
11	Coupling	Iron based powder metallurgy	
12	Motor		
13	Guarding plate	AISI304	
14	Catridge seal		
15	Pump cover	ZG304	ZG316
16	Vent plug assembly	AISI304	AISI316
17	Pump shaft	AISI304	AISI316
18	Pump barrel	AISI304	AISI316
19	Flange	ZG35	


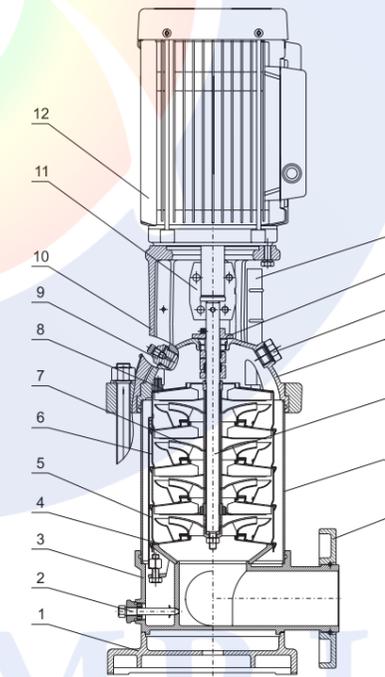


MODEL: LVS10(15,20)


Part	Material	Optional Material	
1	Base plate	HT200	
2	Drainage plug assembly	AISI304	AISI316
3	Chasis	ZG304	ZG316
4	Primary diffuser	AISI304	AISI316
5	Diffuser with bearing	AISI304	AISI316
6	Medium diffuser	AISI304	AISI316
7	Impeller	AISI304	AISI316
8	Final diffuser	AISI304	AISI316
9	Filling plug	AISI304	AISI316
10	Motor base	HT200	
11	Coupling	Iron based powder metallurgy	
12	Motor		
13	Guarding plate	AISI304	
14	Catridge seal		
15	Vent plug assembly	AISI304	AISI316
16	Pump cover	ZG304	AISI316
17	Pump shaft	AISI304	AISI316
18	Pump barrel	AISI304	AISI316
19	Flange	ZG35	

EDUPUMP.IR

HYDRAULIC PERFORMANCE CURVES

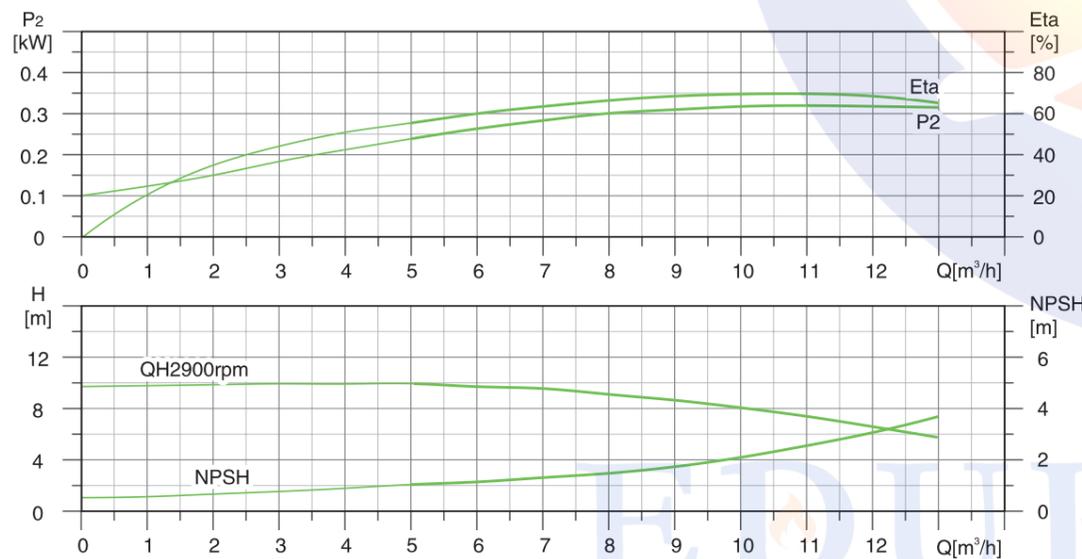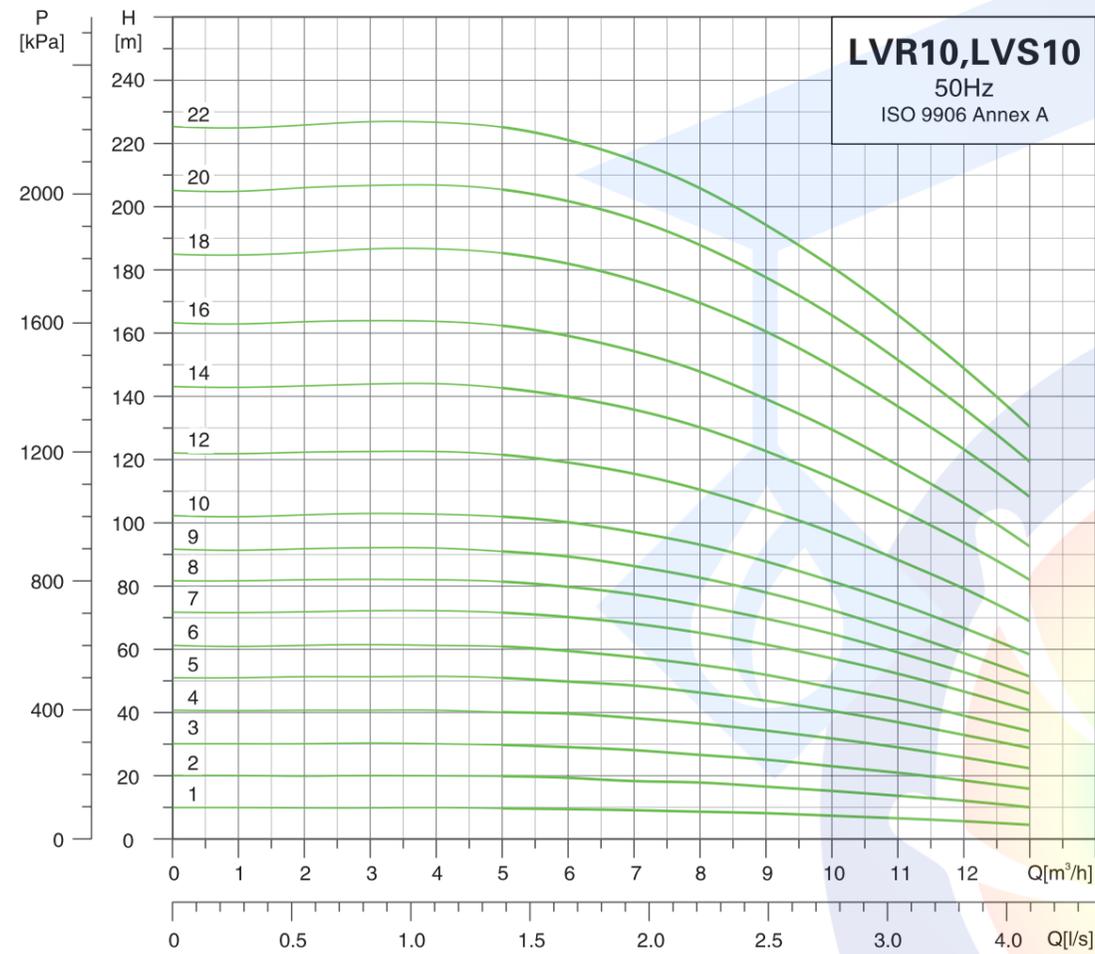

DIMENSION DRAWING

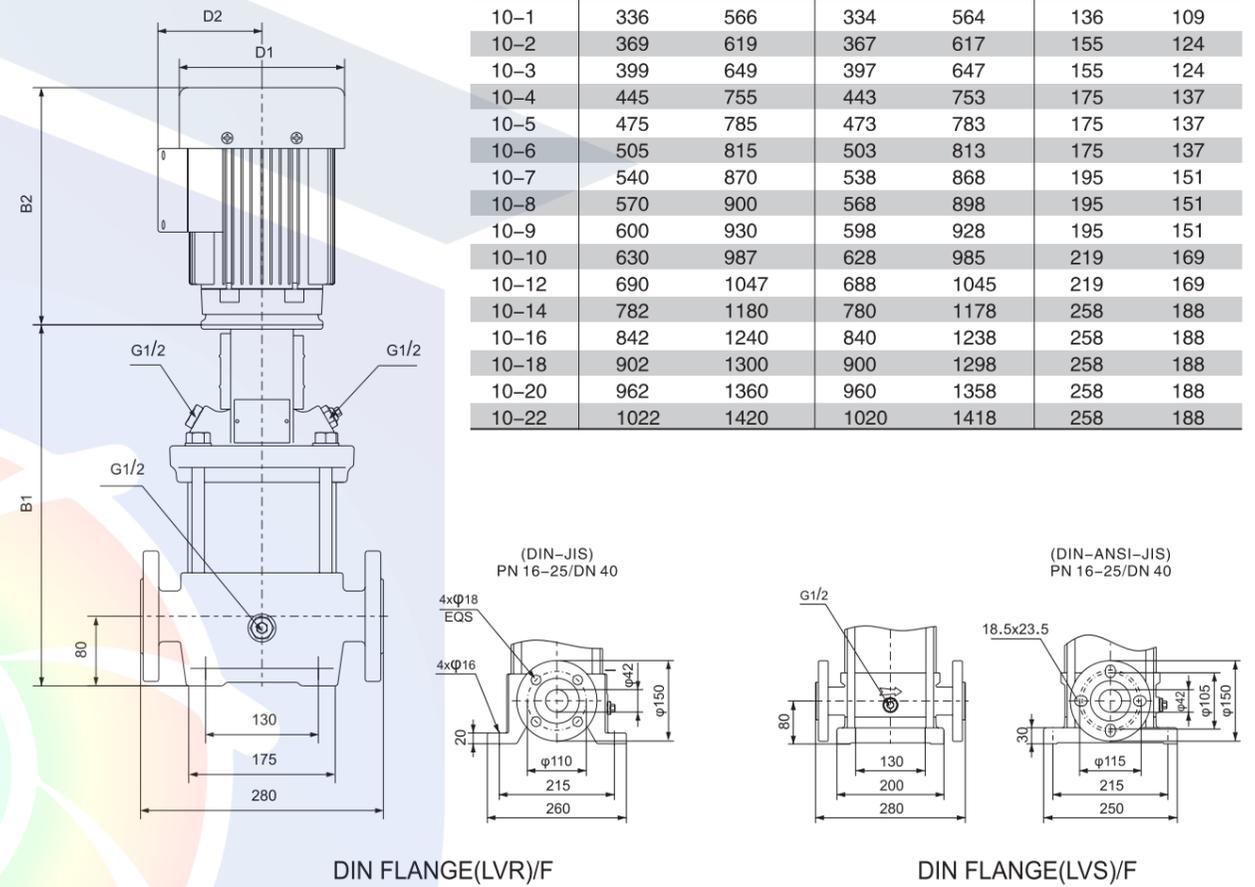

MODEL	DIN FLANGE(LVR)		DIN FLANGE(LVS)		D1	D2
	B1	B1+B2	B1	B1+B2		
10-1	336	566	334	564	136	109
10-2	369	619	367	617	155	124
10-3	399	649	397	647	155	124
10-4	445	755	443	753	175	137
10-5	475	785	473	783	175	137
10-6	505	815	503	813	175	137
10-7	540	870	538	868	195	151
10-8	570	900	568	898	195	151
10-9	600	930	598	928	195	151
10-10	630	987	628	985	219	169
10-12	690	1047	688	1045	219	169
10-14	782	1180	780	1178	258	188
10-16	842	1240	840	1238	258	188
10-18	902	1300	900	1298	258	188
10-20	962	1360	960	1358	258	188
10-22	1022	1420	1020	1418	258	188

MODEL	POWER[kW]	Q[m³/h]	2	4	6	8	10	12
10-1	0.37	H(m)	10	10	9	8	7	5
10-2	0.75		20	20	19	18	15	12
10-3	1.1		30	30	29	26	23	18
10-4	1.5		40	40	40	36	32	26
10-5	2.2		51	51	50	46	40	33
10-6	2.2		61	61	59	55	48	39
10-7	3.0		72	72	70	65	57	46
10-8	3.0		82	82	80	74	65	53
10-9	3.0		92	92	89	82	72	59
10-10	4.0		102	102	100	93	81	66
10-12	4.0		122	122	119	110	97	79
10-14	5.5		143	144	140	130	114	94
10-16	5.5	163	163	159	148	129	106	
10-18	7.5	185	186	182	169	149	123	
10-20	7.5	206	204	201	188	165	136	
10-22	7.5	226	226	221	206	181	147	



EDUPUMP
WWW.EDUPUMP.IR

اولین و بزرگترین

سایت تخصصی سیستم‌های پمپاژ
با امکان محاسبه آنلاین و انتخاب پمپ

تولید بوستر پمپ آتش نشانی

در کلاس‌های S3 - S2 - S1
مورد تایید سازمان آتش نشانی تهران



اولین و بزرگترین مرجع انتخاب آنلاین سیستم‌های پمپاژ

انتخاب آنلاین انواع بوستر پمپ

انتخاب آنلاین انواع پمپ

ارائه مطالب تخصصی

اولین سایت مرجع

انتخاب آنلاین پمپ

در حوزه‌های:

ایمنی و آتش نشانی
آب و فاضلاب
صنایع غذایی
استخر
صنعت
معدن



تولید بوستر پمپ

آبرسانی دور متغیر

بدون محدودیت برند



آموزش

مشاوره - طراحی - اجراء

تاسیسات مکانیکی (موتورخانه - استخر)
تهویه و تخلیه دود
سیستم‌های پمپاژ
ایمنی معماری
اعلام حریق
اطفاء حریق

تهویه و تخلیه دود
سیستم‌های پمپاژ
ایمنی معماری
اطفاء حریق
اعلام حریق

سرمايش و گرمایش موتورخانه
نرم افزار فنی و مهندسی
استخر، سونا و جکوزی
سیستم‌های پمپاژ

تهران، سعدی شمالی، خیابان مرادی نور، پلاک ۳۱

تلفن: ۰۲۱-۷۷۶۸۶۹۶۶ فکس: ۰۲۱-۷۷۶۷۸۶۵۹

EDUPUMP.IR

WWW.EDUPUMP.IR