

APPLICATIONS

- LVR(S) series, vertical multistage centrifugal pump, is suitable for transferring liquids of low viscosity, non-inflammable and non-explosive, not containing solid particles or fibers.
- Water supply: water supply & drainage for high-rise buildings, filtration and transfer at waterworks, pressure boosting in main pipe
  - Industry: Washing and cleaning systems, boiler feeding, cooling water circulation, water treatment systems, auxiliary system, support equipment
  - Water treatment: ultra-filtration systems, reverse-osmosis systems, distillation systems, separators, swimming pools
  - Agricultural irrigation: sprinkler irrigation, drip-feed irrigation
  - Food & beverage industry
  - Fire-fighting system

FEATURES

- Compact, nice appearance, efficient, low noise, reliable seal, easy to use and maintain


OPERATING CONDITIONS

- Low viscosity, non-inflammable and non-explosive liquids not containing solid particles or fibers. The liquids must not chemically attack the pump materials. When pumping liquids with a density or viscosity is higher than that of water, a motor with a higher output power rating shall be used.
- Liquid temperature: -15°C+120°C
  - Flow ranges: 0.7-85m³/h
  - pH: 3~9
  - Max. ambient temperature: +40°C
  - Max. operation pressure: 33bar
  - Altitude: up to 1000m

MOTOR

- Totally enclosed & fan-cooled motor
- Protection class: IP 55
- Standard voltage: 50Hz 1 × 220V/3 × 380V


IDENTIFICATION CODES

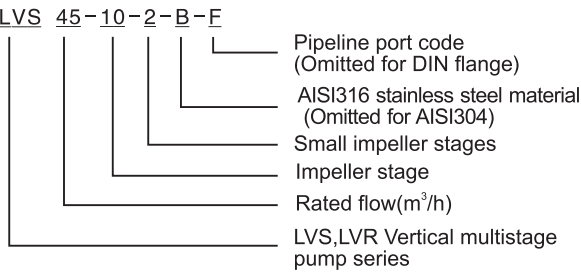

LVS: Stainless steel wetted parts  
LVR: Cast iron base & pump cover

Identifications codes of flange structure

F: DIN flange ; A: Oval flange  
K: Clamp connector ; G: Threaded connector

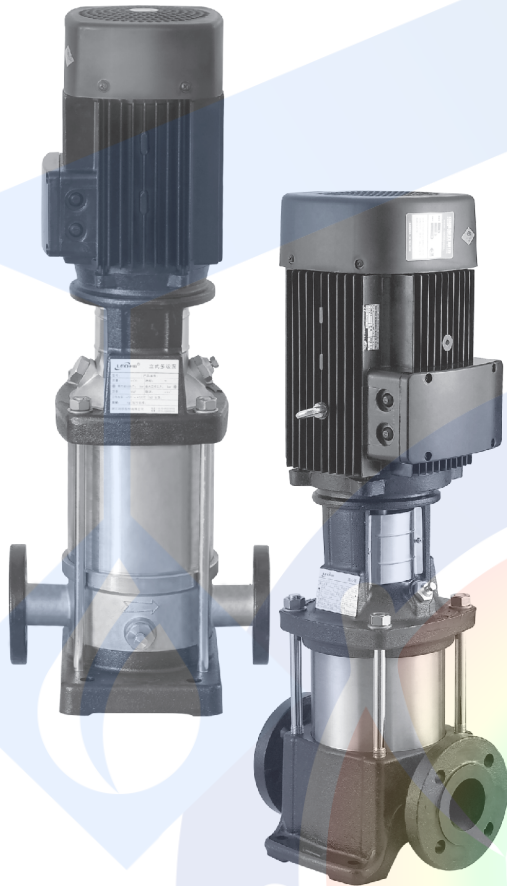


000003

AMBIENT TEMPERATURE

Max. ambient temperature: + 40°C. Ambient temperature above 40 or installation at altitude of more than 1000 meters above sea level require the use of an oversize motor. Because of low air density and poor cooling effects, the motor output power P<sub>2</sub> will be decreased. See the picture.

In such cases, it may be necessary to use a motor with a higher output power rating.

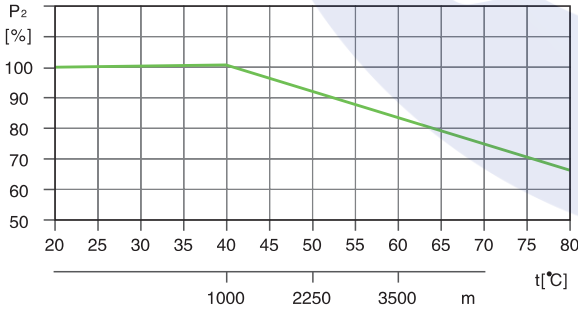

For example, when the pump is installed at altitude of more than 3500 meters above sea level, P<sub>2</sub> will be decreased to 88%. When the ambient temperature is 70°C, P<sub>2</sub> will be decreased to 78%.

MINIMUM INLET PRESSURE-NPSH


Calculation of the inlet pressure “H” is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.


To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump. The maximum suction lift “H” in meters head can be calculated as follows:

|                |                                                                                                                                                  |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| H              | = P <sub>b</sub> × 10.2-NPSH-H <sub>f</sub> -H <sub>v</sub> -H <sub>s</sub>                                                                      |
| P <sub>b</sub> | = Barometric pressure in bar. (Barometric pressure can be set to 1 bar). In closed systems, P <sub>b</sub> indicates the system pressure in bar. |
| NPSH           | = Net Positive Suction Head in meters head. (To be read from the NPSH curve at the highest flow the pump will be delivering.)                    |
| H <sub>f</sub> | = Friction loss in suction pipe in meters head. (At the highest flow the pump will be delivering.)                                               |
| H <sub>v</sub> | = Vapor pressure in meters head. (To be read from the vapor pressure scale. “H <sub>v</sub> ” depends on the liquid temperature “tm”)            |
| H <sub>s</sub> | = Safety margin=minimum 0.5 meters head.                                                                                                         |

If the “H” calculated is positive, the pump can operate at a suction lift of maximum “H” meters head.  
If the “H” calculated is negative, an inlet pressure of minimum “H” meters head is required.

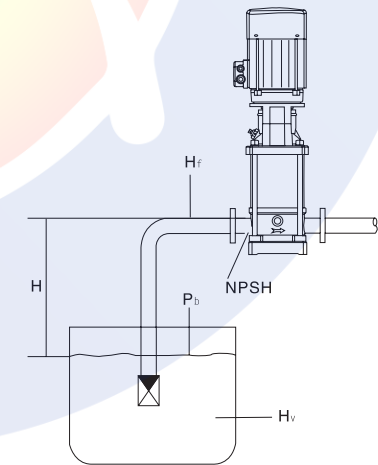

**Note:** To avoid cavitation, never select a pump with a duty point too far to the right on the NPSH curve. Always check the NPSH value of the pump at the highest possible flow.




MAXIMUM INLET PRESSURE

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve must always be lower than the Max. permissible operating pressure.  
If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

| Pump Type        | Maximum Inlet Pressure [bar] |
|------------------|------------------------------|
| LVR1,LVS1        |                              |
| 1-2 — 1-36       | 10                           |
| LVR2,LVS2        |                              |
| 2-2              | 6                            |
| 2-3 — 2-11       | 10                           |
| 2-13 — 2-26      | 15                           |
| LVR3,LVS3        |                              |
| 3-2 — 3-29       | 10                           |
| 3-31 — 3-26      | 15                           |
| LVR4,LVS4        |                              |
| 4-2              | 6                            |
| 4-3 — 4-10       | 10                           |
| 4-12 — 4-22      | 15                           |
| LVR5,LVS5        |                              |
| 5-2 — 5-16       | 10                           |
| 5-18 — 5-29      | 15                           |
| LVR10,LVS10      |                              |
| 10-1 — 10-6      | 8                            |
| 10-7 — 10-22     | 10                           |
| LVR15,LVS15      |                              |
| 15-1 — 15-3      | 8                            |
| 15-4 — 15-17     | 10                           |
| LVR20,LVS20      |                              |
| 20-1 — 20-3      | 8                            |
| 20-4 — 20-17     | 10                           |
| LVR32,LVS32      |                              |
| 32-1-1 — 32-4    | 4                            |
| 32-5-2 — 32-10   | 10                           |
| 32-11 — 32-14    | 15                           |
| LVR45,LVS45      |                              |
| 45-1-1 — 45-2    | 4                            |
| 45-3-2 — 45-5    | 10                           |
| 45-6-2 — 45-13-2 | 15                           |
| LVR64,LVS64      |                              |
| 64-1-1 — 64-2-2  | 4                            |
| 64-2-1 — 64-4-2  | 10                           |
| 64-4-1 — 64-8-1  | 15                           |

HOW TO READ THE CURVE CHARTS

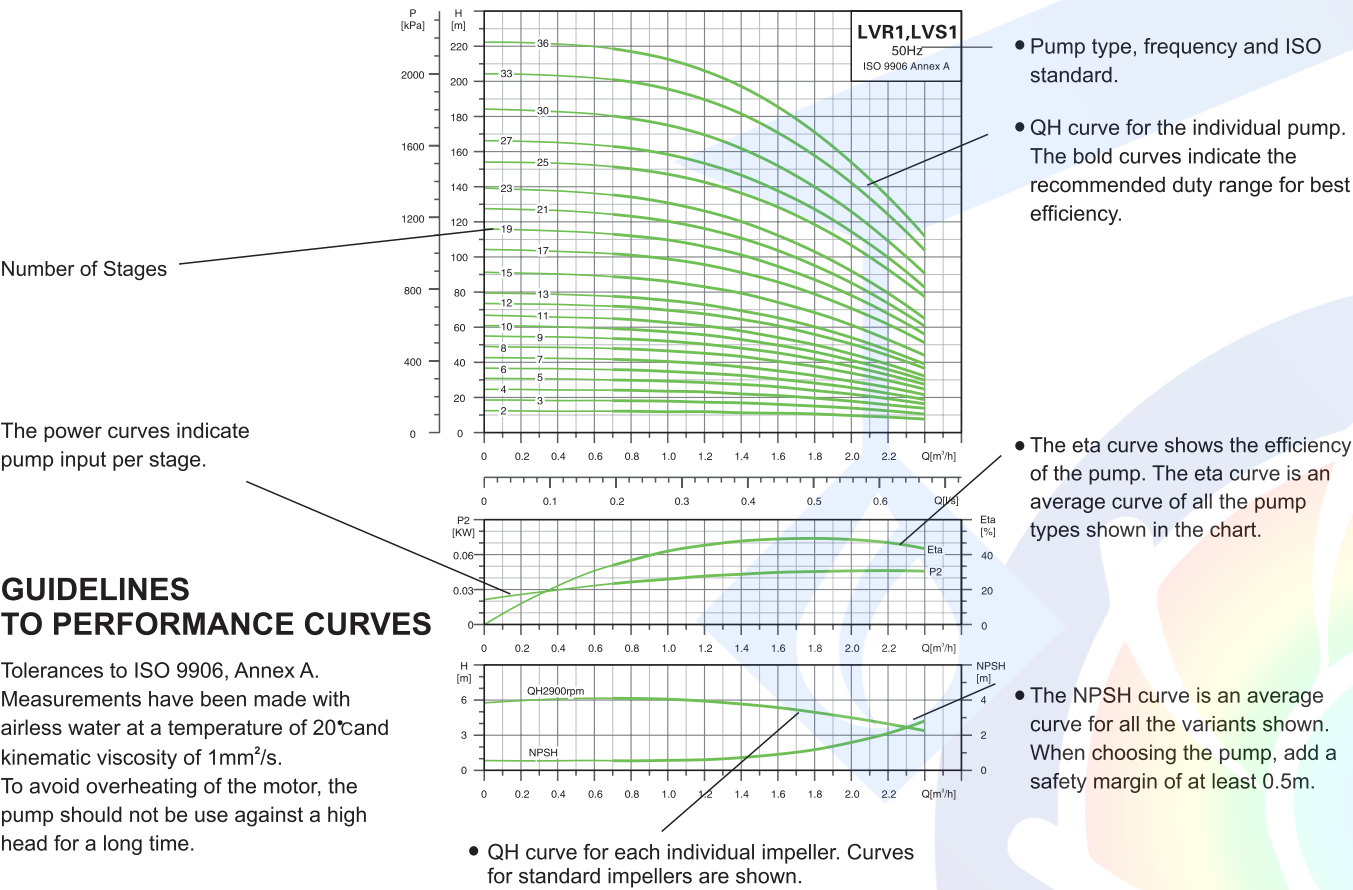


GUIDELINES TO PERFORMANCE CURVES

- Tolerances to ISO 9906, Annex A.
- Measurements have been made with airless water at a temperature of 20°C and kinematic viscosity of 1mm²/s.
- To avoid overheating of the motor, the pump should not be use against a high head for a long time.

MINIMUM FLOW RATE


Due to the risk of overheating, the pump should not be used at a flow below the minimum flow rate. The curve below shows the minimum flow rate as a percentage of the nominal flow rate in relation to the liquid temperature.

Air cooling apparatus

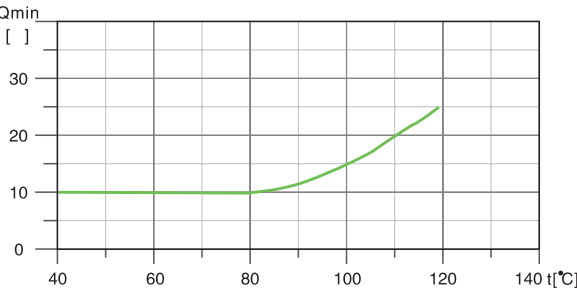

**Note:** The outlet valve must be opened when the pump is in operation.

TERMINAL BOX POSITIONS  
(Note: set to position 1 before delivery)

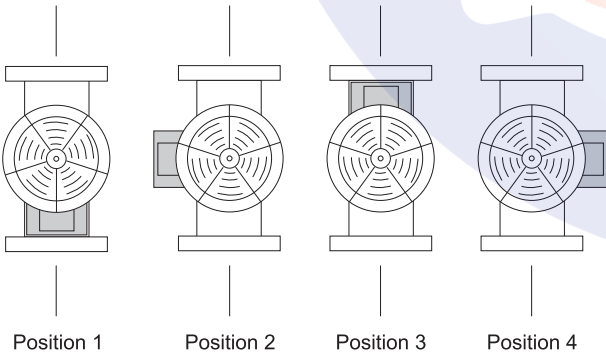


PRODUCT RANGE


| MODEL                    | LVR(S)1                                                                                                           | LVR(S)2 | LVR(S)3 | LVR(S)4 | LVR(S)5 | LVR(S)10 | LVR(S)15 | LVR(S)20 | LVR(S)32 | LVR(S)45 | LVR(S)64 |
|--------------------------|-------------------------------------------------------------------------------------------------------------------|---------|---------|---------|---------|----------|----------|----------|----------|----------|----------|
| DESCRIPTION              |                                                                                                                   |         |         |         |         |          |          |          |          |          |          |
| Rated flow [m³/h]        | 1                                                                                                                 | 2       | 3       | 4       | 5       | 10       | 15       | 20       | 32       | 45       | 64       |
| Flow range [m³/h]        | 0.7–2.4                                                                                                           | 1.0–3.5 | 1.2–4.5 | 1.5–8   | 2.5–8.5 | 5–13     | 8–23     | 10.5–29  | 15–40    | 22–58    | 30–85    |
| Max. pressure [bar]      | 22                                                                                                                | 23      | 24      | 21      | 24      | 22       | 23       | 25       | 28       | 33       | 22       |
| Motor power [kW]         | 0.37–2.2                                                                                                          | 0.37–3  | 0.37–3  | 0.37–4  | 0.37–4  | 0.37–7.5 | 1.1–15   | 1.1–18.5 | 1.5–30   | 3–45     | 4–45     |
| Temperature Range [°C]   | –20°C~+120°C ( Note: Both the Max. permissible pressure and liquid temperature range refer to the pump capacity.) |         |         |         |         |          |          |          |          |          |          |
| Max. pump efficiency [%] | 45                                                                                                                | 46      | 55      | 59      | 60      | 65       | 70       | 72       | 78       | 79       | 80       |
| Pipe connection-LVR      |                                                                                                                   |         |         |         |         |          |          |          |          |          |          |
| Oval flange              | G1                                                                                                                | G1      | G1      | G1 1/4  | G1 1/4  | –        | –        | –        | –        | –        | –        |
| DIN flange               | –                                                                                                                 | –       | –       | –       | –       | DN 42    | DN 50    | DN 50    | DN65     | DN80     | DN100    |
| Flange structure         | ○                                                                                                                 | ○       | ○       | ○       | ○       | ○        | ○        | ○        | ●        | ●        | ●        |
| Pipe connection-LVS      |                                                                                                                   |         |         |         |         |          |          |          |          |          |          |
| Oval flange              | –                                                                                                                 | –       | –       | –       | –       | –        | –        | –        | –        | –        | –        |
| DIN flange               | DN 32                                                                                                             | DN 32   | DN 32   | DN 32   | DN 32   | DN 42    | DN 50    | DN 50    | DN65     | DN80     | DN100    |
| Clamp connector          | φ42                                                                                                               | φ42     | φ42     | φ42     | φ42     | –        | –        | –        | –        | –        | –        |
| Threaded connector       | G1 1/4                                                                                                            | G1 1/4  | G1 1/4  | G1 1/4  | G1 1/4  | –        | –        | –        | –        | –        | –        |
| Flange structure         | ●                                                                                                                 | ●       | ●       | ●       | ●       | ●        | ●        | ●        | ●        | ●        | ●        |

Note: ○ It means stationary flange structure , ● It means dynamic flange structure

SCOPE OF PERFORMANCE-LVR,LVS

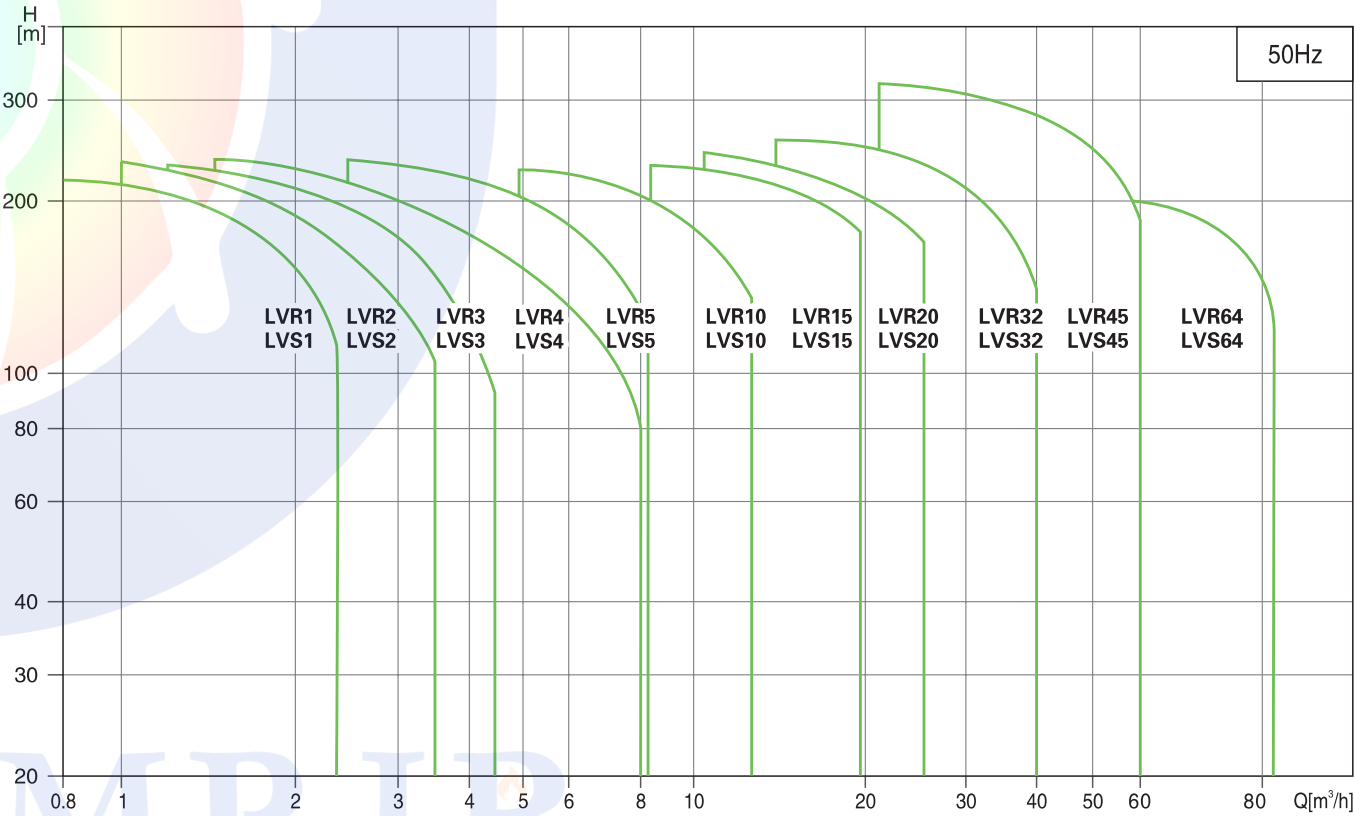


CROSS SECTION

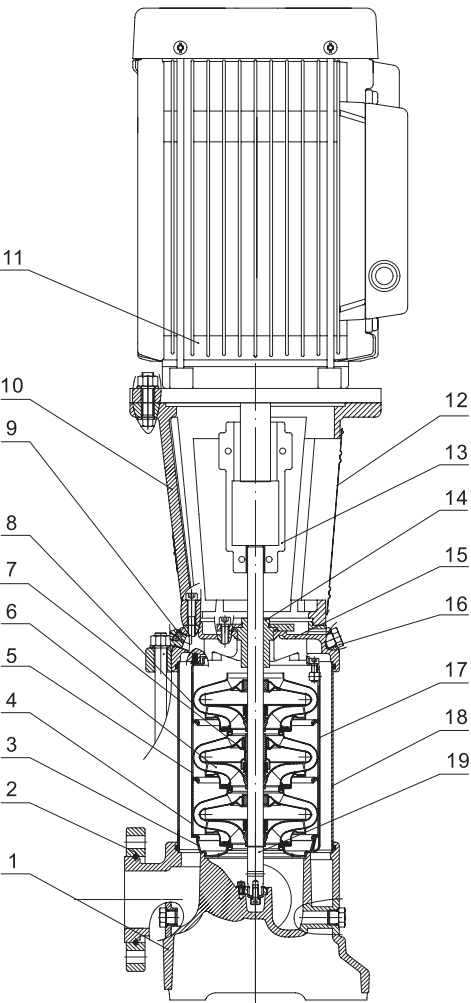

MODEL: LVR32(45,64)

|    | Part                   | Material |
|----|------------------------|----------|
| 1  | Base                   | HT200    |
| 2  | Drainage plug assembly | ZG35     |
| 3  | Primary diffuser       | AISI304  |
| 4  | Medium diffuser        | AISI304  |
| 5  | Diffuser with bearing  | AISI304  |
| 6  | Impeller               | AISI304  |
| 7  | Actuator               |          |
| 8  | Final diffuser         | AISI304  |
| 9  | Vent plug assembly     | AISI304  |
| 10 | Motor base             | HT200    |
| 11 | Motor                  |          |
| 12 | Guarding plate         | AISI304  |
| 13 | Coupling               | QT400    |
| 14 | Catridge seal          |          |
| 15 | Pump cover             | ZG304    |
| 16 | Filling plug           | AISI304  |
| 17 | Tension plate          | AISI304  |
| 18 | Pump barrel            | AISI304  |
| 19 | Pump shaft             | AISI304  |

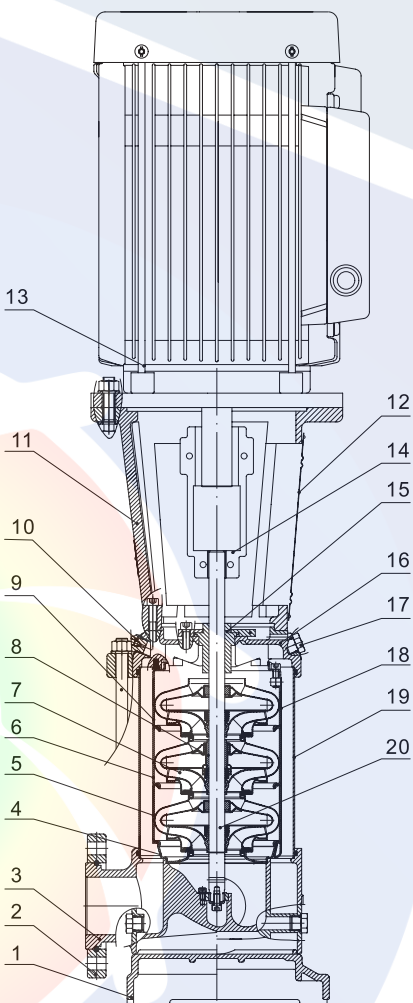


MODEL: LVS32(45,64)

|    | Part                  | Material | Optional Material |
|----|-----------------------|----------|-------------------|
| 1  | Base plate            | HT200    |                   |
| 2  | Flange                | ZG35     |                   |
| 3  | Chasis                | ZG304    | ZG316             |
| 4  | Primary diffuser      | AISI304  | AISI316           |
| 5  | Medium diffuser       | AISI304  | AISI316           |
| 6  | Diffuser with bearing | AISI304  | AISI316           |
| 7  | Impeller              | AISI304  | AISI316           |
| 8  | Actuator              |          |                   |
| 9  | Final diffuser        | AISI304  | AISI316           |
| 10 | Vent plug assembly    | AISI304  | AISI316           |
| 11 | Motor base            | HT200    |                   |
| 12 | Motor                 |          |                   |
| 13 | Guarding plate        | AISI304  |                   |
| 14 | Coupling              | QT400    |                   |
| 15 | Catridge seal         |          |                   |
| 16 | Pump cover            | ZG304    | ZG316             |
| 17 | Filling plug          | AISI304  | AISI316           |
| 18 | Tension plate         | AISI304  | AISI316           |
| 19 | Pump barrel           | AISI304  | AISI316           |
| 20 | Pump shaft            | AISI304  | AISI316           |




HYDRAULIC PERFORMANCE CURVES

DIMENSION DRAWING

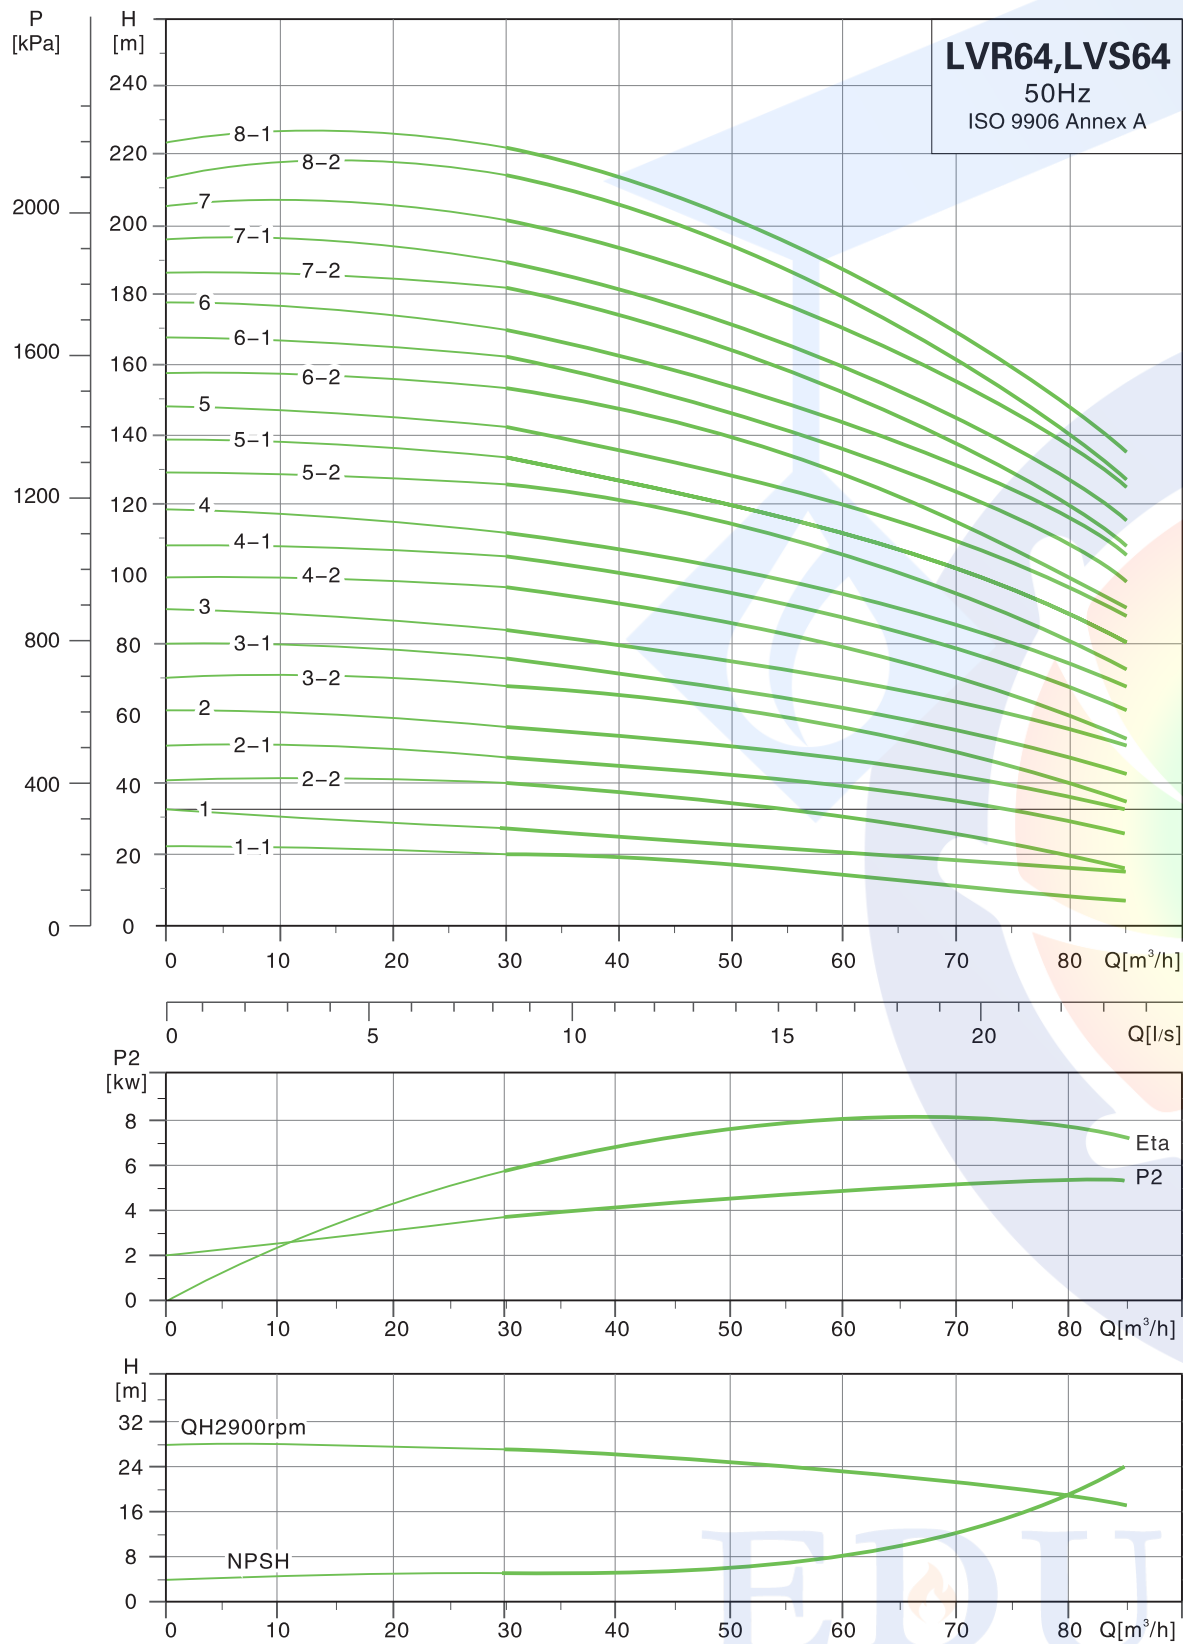

| MODEL  | DIN FLANGE(LVR, LVS) |       | D1  | D2  |
|--------|----------------------|-------|-----|-----|
|        | B1                   | B1+B2 |     |     |
| 64-1-1 | 561                  | 933   | 220 | 134 |
| 64-1   | 561                  | 952   | 220 | 134 |
| 64-2-2 | 644                  | 1035  | 220 | 134 |
| 64-2-1 | 754                  | 1252  | 334 | 263 |
| 64-2   | 754                  | 1252  | 334 | 263 |
| 64-3-2 | 836                  | 1334  | 334 | 263 |
| 64-3-1 | 836                  | 1334  | 334 | 263 |
| 64-3   | 836                  | 1334  | 334 | 263 |
| 64-4-2 | 919                  | 1417  | 334 | 263 |
| 64-4-1 | 919                  | 1481  | 382 | 305 |
| 64-4   | 919                  | 1481  | 382 | 305 |
| 64-5-2 | 1001                 | 1661  | 420 | 372 |
| 64-5-1 | 1001                 | 1661  | 420 | 372 |
| 64-5   | 1001                 | 1661  | 420 | 372 |
| 64-6-2 | 1084                 | 1744  | 420 | 372 |
| 64-6-1 | 1084                 | 1744  | 420 | 372 |
| 64-6   | 1084                 | 1744  | 420 | 372 |
| 64-7-2 | 1166                 | 1826  | 420 | 372 |
| 64-7-1 | 1166                 | 1826  | 420 | 372 |
| 64-7   | 1166                 | 1842  | 458 | 427 |
| 64-8-2 | 1249                 | 1925  | 458 | 427 |
| 64-8-1 | 1249                 | 1925  | 458 | 427 |

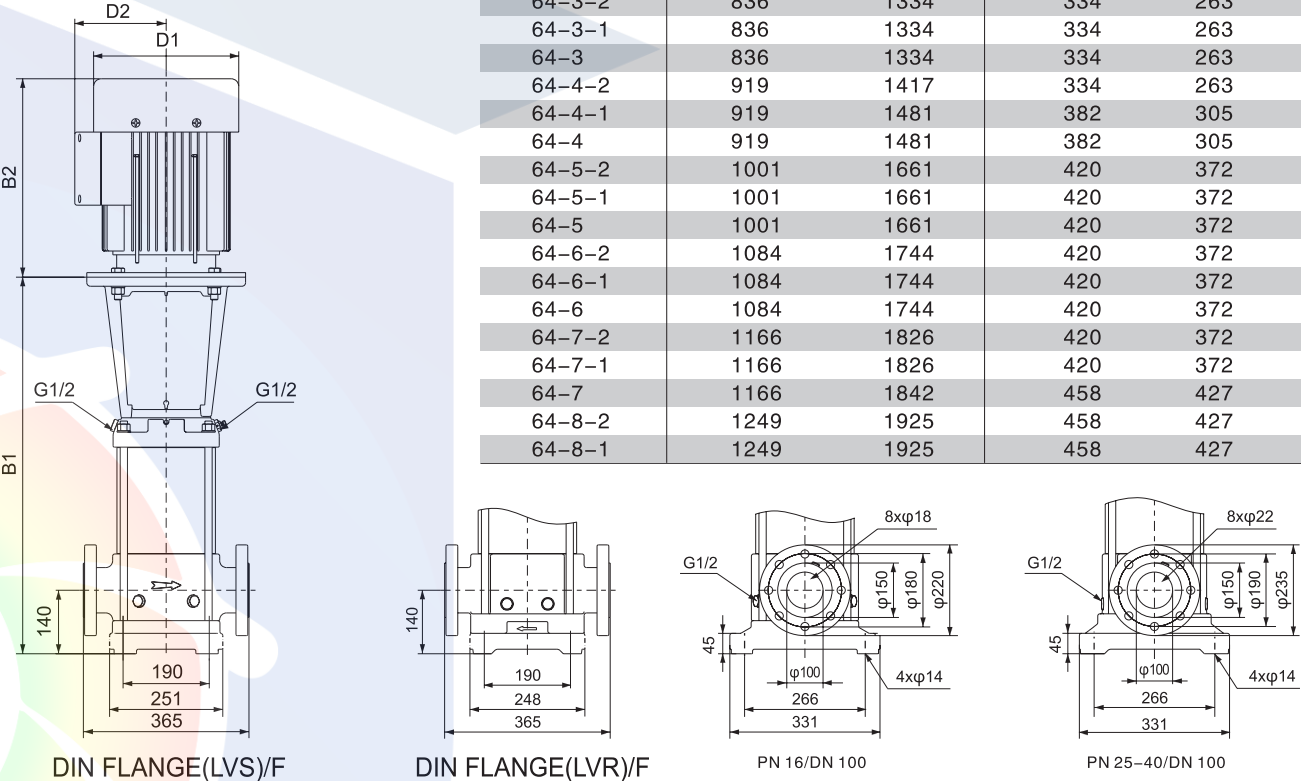

| MODEL  | POWER[kW] | Q[m³/h] | 30   | 40   | 50   | 64   | 70   | 80   |
|--------|-----------|---------|------|------|------|------|------|------|
| 64-1-1 | 4         |         | 20   | 19   | 17.5 | 15.5 | 12   | 8.5  |
| 64-1   | 5.5       |         | 27   | 25.5 | 23.5 | 21.5 | 20   | 17   |
| 64-2-2 | 7.5       |         | 40   | 38   | 35.5 | 31   | 25.5 | 19   |
| 64-2-1 | 11        |         | 48   | 45.5 | 42.5 | 38   | 34.5 | 29   |
| 64-2   | 11        |         | 55   | 52.5 | 49.5 | 44.5 | 41.5 | 36   |
| 64-3-2 | 15        |         | 68   | 65.5 | 60   | 54   | 48.5 | 40   |
| 64-3-1 | 15        |         | 75.5 | 72   | 67.5 | 60   | 55.5 | 47   |
| 64-3   | 18.5      |         | 83.5 | 80   | 76   | 66.5 | 64   | 56   |
| 64-4-2 | 18.5      |         | 96   | 92.5 | 87   | 76   | 70   | 59   |
| 64-4-1 | 22        |         | 104  | 100  | 94.5 | 82.5 | 78.5 | 67.5 |
| 64-4   | 22        |         | 112  | 107  | 102  | 89   | 85.5 | 74.5 |
| 64-5-2 | 30        |         | 126  | 122  | 115  | 100  | 94   | 80.5 |
| 64-5-1 | 30        |         | 134  | 129  | 122  | 106  | 102  | 88   |
| 64-5   | 30        |         | 141  | 136  | 129  | 113  | 109  | 96   |
| 64-6-2 | 30        |         | 154  | 148  | 140  | 122  | 115  | 99   |
| 64-6-1 | 37        |         | 162  | 156  | 148  | 129  | 124  | 108  |
| 64-6   | 37        |         | 170  | 163  | 155  | 135  | 131  | 116  |
| 64-7-2 | 37        |         | 182  | 176  | 166  | 145  | 138  | 119  |
| 64-7-1 | 37        |         | 190  | 183  | 173  | 151  | 145  | 126  |
| 64-7   | 45        |         | 202  | 194  | 184  | 163  | 155  | 136  |
| 64-8-2 | 45        |         | 214  | 207  | 196  | 172  | 163  | 140  |
| 64-8-1 | 45        |         | 222  | 214  | 203  | 180  | 170  | 148  |



## اولین و بزرگترین

سایت تخصصی سیستم‌های پمپاژ  
با امکان محاسبه آنلاین و انتخاب پمپ

## تولید بوستر پمپ آتش نشانی

در کلاس‌های S3 - S2 - S1  
مورد تایید سازمان آتش نشانی تهران



اولین و بزرگترین مرجع انتخاب آنلاین سیستم‌های پمپاژ

انتخاب آنلاین انواع بوستر پمپ

انتخاب آنلاین انواع پمپ

ارائه مطالب تخصصی

## اولین سایت مرجع انتخاب آنلاین پمپ

در حوزه‌های:

ایمنی و آتش نشانی  
آب و فاضلاب  
صنایع غذایی  
استخر  
صنعت  
معدن



## تولید بوستر پمپ آبرسانی دور متغیر بدون محدودیت برند



## آموزش

تهویه و تخلیه دود  
سیستم‌های پمپاژ  
ایمنی معماری  
اطفاء حریق  
اعلام حریق

## مشاوره - طراحی - اجراء

تاسیسات مکانیکی (موتورخانه - استخر)  
تهویه و تخلیه دود  
سیستم‌های پمپاژ  
ایمنی معماری  
اعلام حریق  
اطفاء حریق

سرمایش و گرمایش موتورخانه  
نرم افزار فنی و مهندسی  
استخر، سونا و جکوزی  
سیستم‌های پمپاژ

تهران، سعدی شمالی، خیابان مرادی نور، پلاک ۳۱

تلفن: ۰۲۱-۷۷۶۸۶۹۶۶ فکس: ۰۲۱-۷۷۶۷۸۶۵۹

EDUPUMP.IR

WWW.EDUPUMP.IR